GENERAL SERVICES ADMINISTRATION
FEDERAL SUPPLY SERVICE
AUTHORIZED SUPPLY SCHEDULE PRICE LIST

SCHEDULE 56, BUILDING MATERIALS/INDUSTRIAL SERVICES AND SUPPLIES

FSC54, PRE-ENGINEERED AND PREFABRICATED BUILDINGS AND STRUCTURES(FSC CLASS /PRODUCT CODE: 5410)

PERIOD JULY 1, 2008 - JUNE 30, 2013

CONTRACT NUMBER: GS-07F-0419U

EARL INDUSTRIES, LLC
2 HARPER AVENUE
PORTSMOUTH, VA 23707

CONTACT MANAGER: MICHAEL BARKAN
PHONE: 757-393-0034
FAX: 757-393-7672
WEBSITE: www.earl-ind.com
EMAIL: sales@earlmfg.com

CONTRACTOR'S ADMIN SOURCE: MELISSA MAYNARD
mmaynard@earlmfg.com

BUSINESS SIZE: OTHER THAN SMALL

INFORMATION FOR ORDERING ACTIVITIES

1a. TABLE OF AWARDED SPECIAL ITEM NUMBERS (SINS)

SIN	DESCRIPTION
361 10A	PRE-ENGINEERED AND PREFABRICATED BUILDINGS AND STRUCTURES FOR STORAGE SOLUTIONS
361 10D	PRE-ENGINEERED AND PREFABRICATED BUILDINGS AND STRUCTURES FOR MILITARY, DISASTER/EMERGENCY RESPONSE, AND MEDICAL FACILITY SOLUTIONS
361 10E	PRE-ENGINEERED AND PREFABRICATED BUILDINGS AND STRUCTURES FOR PROFESSIONAL FACILITY SOLUTIONS
361 10H	PRE-ENGINEERED AND PREFABRICATED BUILDINGS AND STRUCTURES FOR RESTROOM, SHOWER, AND LAUNDRY SOLUTIONS

1b. IDENTIFICATION OF THE LOWEST PRICED MODEL NUMBER AND PRICE FOR EACH SIN:

SIN	MODEL/DESCRIPTION	NET GSA PRICE
361 10A	BCK-20-01 – FLATPACK CONTAINER	$15040.34
361 10D	BCK-26-41 – TEMPORARY ACCOMADATION MODULE	$60867.97
361 10E	BCK-22-01 – OFFICE CONTAINER	$28369.91
361 10H	BCK-26-12 – WATER CLOSET MODULE	$73815.80

1c. HOURLY RATES: N/A

2. MAXIMUM ORDER BY SIN:

361 10A - $150,000
361 10D - $300,000
361 10E - $500,000
361 10H - $200,000

IF THE 'BEST VALUE' SELECTION PLACES YOUR ORDER OVER THIS MAXIMUM ORDER IDENTIFIED IN THIS CATALOG/PRICELIST, YOU HAVE AN OPPORTUNITY TO OBTAIN A BETTER SCHEDULE CONTRACT PRICE. BEFORE PLACING YOUR ORDER, CONTACT THE AFOREMENTIONED CONTRACTOR FOR A BETTER PRICE. THE CONTRACTOR MAY (1) OFFER A NEW PRICE FOR THIS REQUIREMENT (2) OFFER THE LOWEST PRICE AVAILABLE UNDER THIS CONTRACT OR (3) DECLINE THE ORDER. A DELIVERY ORDER THAT EXCEEDS THE MAXIMUM ORDER MAY BE PLACED UNDER THE SCHEDULE CONTRACT IN ACCORDANCE WITH FAR 8.404.

3. MINIMUM ORDER: $100

4. GEOGRAPHIC COVERAGE (DELIVERY AREA): DOMESTIC DELIVERY – THE 48 CONTIGUOUS STATES, D.C., ALASKA, HAWAII, PUERTO RICO AND U.S. TERRITORIES.

5. POINT(S) OF PRODUCTION: DUVAL COUNTY AND CITY OF PORTSMOUTH

6. DISCOUNT FROM LIST PRICES OR STATEMENT OF NET PRICE:
   BASIC DISCOUNT IS 6%
   BASIC DISCOUNT IS TO BE APPLIED TO THE FOLLOWING PRICE LIST:
   EARL INDUSTRIES SPECIALIZED CONTAINERIZATION PRICE SCHEDULE DATED 4/15/07

FOR CALCULATION OF THE GSA SCHEDULE PRICE (PRICE PAID BY CUSTOMERS ORDERING FROM THE GSA SCHEDULE, AND THE PRICE TO BE LOADED INTO GSA ADVANTAGE), THE CONTRACTOR SHOULD DEDUCT THE APPROPRIATE BASIC DISCOUNT FROM THE LIST PRICE AND ADD THE PREVAILING IFF RATE TO THE NEGOTIATED DISCOUNTED PRICE (NET GSA PRICE) CURRENT IFF RATE IS 0.75%.

7. QUANTITY DISCOUNT(S): 2% FOR 5 OR MORE CONTAINERS (CALCULATED AS 2% OFF OF TOTAL)

8. PROMPT PAYMENT TERMS: 1% 20 NET 30

9a. NOTIFICATION THAT GOVERNMENT PURCHASE CARDS ARE ACCEPTED BELOW THE MICROPURCHASE THRESHOLD: NOTIFIED AND ACCEPTED

9b. NOTIFICATION WHETHER GOVERNMENT PURCHASE CARDS ARE ACCEPTED OR NOT ACCEPTED ABOVE THE MICRO-PURCHASE THRESHOLD: NOTIFIED AND ACCEPTED

10. FOREIGN ITEMS: NO

11a. TIME OF DELIVERY: 90 DAYS ARO

11b. EXPEDITED DELIVERY: NONE

11c. OVERNIGHT AND 2-DAY DELIVERY: N/A

11d. URGENT DELIVERY: N/A

12. FOB POINT(S): ORIGIN PRE-PAY AND ADD

13a. ORDERING ADDRESS (ES): EARL INDUSTRIES, LLC
2 HARPER AVENUE
PORTSMOUTH, VA 23707
TELEPHONE: 757-393-0034

13b. ORDERING PROCEDURES: ORDERING ACTIVITIES SHALL USE THE ORDERING PROCEDURES DESCRIBED IN FEDERAL ACQUISITION REGULATIONS 8.405 WHEN PLACING AN ORDER OR ESTABLISHING A BPA FOR SUPPLIES OR SERVICES. THE ORDERING PROCEDURES, INFORMATION ON BLANKET PURCHASE AGREEMENTS (BPA'S) AND A SAMPLE BPA CAN ALSO BE FOUND AT THE GSA/FSS SCHEDULE HOMEPAGE (fss.gsa.gov/schedules).

14. PAYMENT ADDRESS (ES): EARL INDUSTRIES, LLC
P.O. BOX 890431
CHARLOTTE, NC 29289-0431
TELEPHONE: 757-397-4558

15. WARRANTY PROVISION: STANDARD COMMERCIAL WARRANTY

16. EXPORT PACKING CHARGES (IF APPLICABLE): N/A

17. TERMS AND CONDITIONS OF GOVERNMENT PURCHASE CARD ACCEPTANCE (ANY THRESHOLDS ABOVE THE MICRO-PURCHASE LEVEL: ACCEPTED UP TO $30,000

18. TERMS AND CONDITIONS OF RENTAL, MAINTENANCE, AND REPAIR (IF APPLICABLE): N/A

19. TERMS AND CONDITIONS OF INSTALLATION (IF APPLICABLE): N/A

20a. TERMS AND CONDITIONS OF REPAIR PARTS INDICATING DATE OF PARTS PRICE LISTS AND ANY DISCOUNTS FROM LIST PRICES (IF APPLICABLE): N/A

20b. TERMS AND CONDITIONS FOR ANY OTHER SERVICES (IF APPLICABLE): N/A

21. LIST OF SERVICE AND DISTRIBUTION POINTS (IF APPLICABLE): N/A

22. LIST OF PARTICIPATING DEALERS (IF APPLICABLE): N/A

23. PREVENTIVE MAINTENANCE (IF APPLICABLE): N/A

24. SPECIAL ATTRIBUTES SUCH AS ENVIRONMENTAL ATTRIBUTES (e.g. RECYCLED CONTENT, ENERGY EFFICENCY AND/OR REDUCED POLLUTANTS):
EARL INDUSTRIES, LLC WILL USE, WHENEVER POSSIBLE, PRODUCTS THAT HAVE RECYCLED CONTENT, ARE ENERGY EFFICIENT AND/OR CONTAIN REDUCED POLLUTANTS.

25. DATA UNIVERSAL NUMBER SYSTEM (DUNS) NUMBER: 153920269

26. NOTIFICATION REGARDING REGISTRATION IN CENTRAL CONTRACTOR REGISTRATION (CCR) DATABASE: REGISTRATION VALID UNTIL 06/13/09.

Contract Number:
GS-07F-0419U

Period 7/1/08 - 6/30/13

EARL PART NO.	PHOTO	DESCRIPTION	QTY	U/M	NET GSA PRICE	DELIVERY
		20' KNOCK-DOWN BASIS				
BCK-20-01		Flatpack Container - Pre-Finished colaspable container 20' x 8' x 8'-6". Constuction consists of: (a) 2" thick pre-finished wall panel system. (b) steel floor assembly with forklift pockets, ISO corner castings, plywood floor with vinyl covering (c) steel roof assembly with ISO corner castings, finished ceiling, insulated. (d) steel corner posts. (e) aluminum entrance door (f) two vinyl slidng windows with security bars. Units are shipped in sets of four (4) colasped units and shipped as a single ISO 20' container. Options include electrical system, data/phone system, joining kits to combine units side to side or end to end. Units are stackable to three high.	1	EA	$15,040.34	90 days ARO
BCK-20-02		Pre-Finished Container - Pre-Finished container 20' x 8' x 8'-6". Constuction consists of: (a) 2" thick pre-finished wall panel system. (b) steel floor assembly with forklift pockets, ISO corner castings, plywood floor with vinyl covering (c) steel roof assembly with ISO corner castings, finished ceiling, insulated. (d) steel corner posts. (e) aluminum entrance door (f) two vinyl slidng windows with security bars. Units are shipped fully assembled. Options include electrical system, data/phone system, joining kits to combine units side to side or end to end. Units are stackable to three high.	1	EA	$18,813.00	90 days ARO
BCK-20-03		Pre-Finished Personnel Container - Pre-Finished container 20' x 8' x 8'-6". Constuction consists of: (a) 2" thick pre-finished wall panel system. (b) steel floor assembly with forklift pockets, ISO corner castings, plywood floor with vinyl covering (c) steel roof assembly with ISO corner castings, finished ceiling, insulated. (d) steel corner posts. (e) aluminum entrance door (f) two (2) vinyl slidng windows with security bars. Units are shipped fully assembled. Outfting includes electrical system, data/phone system, lighting and HVAC. Options include joining kits to combine units side to side or end to end. Units are stackable to three high.	1	EA	$23,900.46	90 days ARO
BCK-20-22	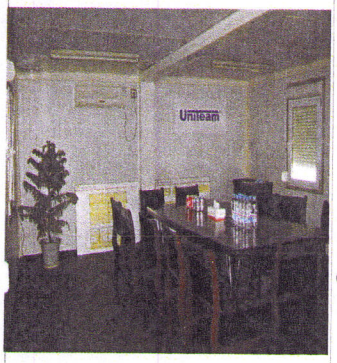	Pre-Finished Double Wide Container - Two (2) Pre-Finished container 20' x 8' x 8'-6". Each consists of: (a) 2" thick pre-finished wall panel system. (b) steel floor assembly with forklift pockets, ISO corner castings, plywood floor with vinyl covering (c) steel roof assembly with ISO corner castings, finished ceiling, insulated. (d) steel corner posts. (e) aluminum entrance door (f) two (2) vinyl slidng windows with security bars. Units are shipped fully assembled as two (2) modules with nessacary joining kits to create a 16' x 20' structure. Options include electrical system, data/phone system and HVAC. Units are stackable to three high.	1	EA	$37,910.41	90 days ARO

Earl Industries, LLC
2 Harper Avenue
Portsmouth, VA 23707
Phone: 757-393-0034
Fax: 757-393-7672

FOB Portsmouth, VA
Terms 1% 20 days, Net 30
Contract Manager:
Michael Barkan
email: sales@earlmfg.com

Contract Number:
GS-07F-0419U

Period 7/1/08 - 6/30/13

BCK-22-01		Office Container - Pre-Finished colaspable container 20' x 8' x 8'-6". See items BCK-20-01 for construction description. Units are shipped fully assembled and outfitted ready to use. Ouftitting includes two (2) desks, (4) chairs, HVAC unit, electrical system, two (2) fire extingishers and lighting. Units are stackable to three high.	1	EA	$28,369.91	90 days ARO
BCK-24-01		Office/Workshop Container - Pre-Finished colaspable container 20' x 8' x 8'-6". See items BCK-20-01 for construction description. Units are shipped fully assembled and outfitted ready to use. Ouftitting includes one (1) desk, (2) chairs, one (1) workbench with rack, two (2) stools, standing mat, HVAC unit, electrical system, two (2) fire extingishers and lighting. Units are stackable to three high.	1	EA	$29,376.24	90 days ARO
BCK-26-41		Temporary Accommodation Module - Pre-Finished colaspable container 20' x 8' x 8'-6". See item BCK-20-01 for construction description. Units are shipped fully assembled and outfitted ready for use. Outfitting includes two (2) double berths, four (4) lockers, two (2) chairs, two (2) wall desks, full size shower, water closet with maserator, PA systems, dual zone HVAC, normal and emergency lighting, privacy curtains, etc. Units are stackable to three high.	1	EA	$60,867.98	90 days ARO
		20' ISO BASIS				
BCI-20-01		Finished Container - Finished container 20' x 8' x 8'-6" ISO NEW container. Constuction consists of: (a) insulated sides and roof. (b) tile floor coating (c) paneled interior walls on studs (d) man door with hardware. (e) active cargo doors with insulation and paneling. Options include electrical system, lighting, HVAC, Windows and data lines.	1	EA	$25,924.07	90 days ARO
BCI-20-02		Finished Container with Windows - Finished container 20' x 8' x 8'-6" ISO NEW container. Constuction consists of: (a) insulated sides and roof. (b) tile floor coating (c) paneled interior walls on studs (d) man door with hardware. (e) active cargo doors with insulation and paneling. Options include electrical system, lighting, HVAC, Windows and data lines.	1	EA	$28,223.33	90 days ARO
BCI-20-03		Personnel Shelter Container - Finished container 20' x 8' x 8'-6" ISO NEW container. Constuction consists of: (a) insulated sides and roof. (b) tile floor coating (c) paneled interior walls on studs (d) man door with hardware. (e) cargo doors fixed close with insulation and paneling. (f) two windows. Outfitting includes electrical system, lighting, HVAC and data lines.	1	EA	$33,071.24	90 days ARO
BCI-22-01		Office Container - Finished ISO NEW container 20' x 8' x 8'-6". See items BCI-20-02 for construction description. Units are shipped outfitted ready to use. Ouftitting includes two (2) desks, (4) chairs, HVAC unit, electrical system, lighting, data lines, two (2) fire extinguishers.	1	EA	$37,828.37	90 days ARO

Earl Industries, LLC
2 Harper Avenue
Portsmouth, VA 23707
Phone: 757-393-0034
Fax: 757-393-7672

FOB Portsmouth, VA
Terms 1% 20 days, Net 30
Contract Manager:
Michael Barkan
email: sales@earlmfg.com

Contract Number:
GS-07F-0419U

Period 7/1/08 - 6/30/13

BCI-22-50	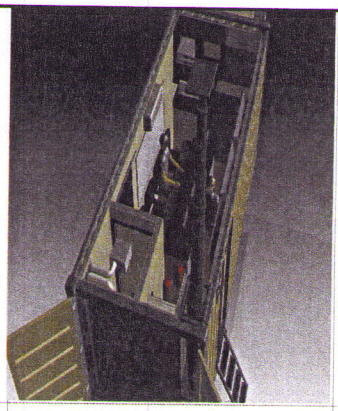	Special Events Security Kit - Kit consists of three (3) containers; One 40' foot eletronic survellience container with numerous monitoring stations, internal toilet, environmentally controlled with external antenna, etc.; One 20' workshop storage container for camera stowage, electronics support, etc. to house the misc survellience equipment to provide video feeds to the sr\urvellience container; One 20' stowage container for stowage of event barriers, patrol bikes, and other security personnel equipment. Does not include the the equipment. Complete specifications available upon request.	1	EA	$344,560.46	90 days ARO
BCI-24-01		Office/Workshop Container - Finished ISO NEW container 20' x 8' x 8'-6". See items BCI-20-02 for construction description. Units are shipped outfitted ready to use. Ouftitting includes one (1) desks, (2) chairs, one (1) workbench with rack/light, two (2) stools, standing mat, HVAC unit, electrical system, lighting, data lines, two (2) fire extinguishers.	1	EA	$41,791.36	90 days ARO
BCI-26-11		Shower Module - Finished ISO NEW container 20' x 8' x 8'-6". Units are outfitted with HPPL wall panels, alum ceiling and tile floor. Each unit contains six (6) individual private shower rooms with exterior entrance door, shower stall, lavatory and dressing bench. Units are shipped fully outfitted ready to use with electrical, lighting and piping pre-installed.	1	EA	$78,820.13	90 days ARO
BCI-26-12		Water Closet Module - Finished ISO NEW container 20' x 8' x 8'-6". Units are outfitted with HPPL wall panels, alum ceiling and tile floor. Each unit contains six (6) individual bathrooms with exterior entrance door, water closet, lavatory and urnial. Units are shipped fully outfitted ready to use with electrical, lighting and piping pre-installed.	1	EA	$73,815.79	90 days ARO
BCI-26-41		Temporary Accommodation Module - Pre-Finished ISO NEW container 20' x 8' x 8'-6". Utilizes special container construction and outfitting materials to meet USCG, IMO, SOLAS, ABS and CSC regulations. Units are shipped fully assembled and outfitted ready for use. Outfitting includes two (2) double berths, four (4) lockers, two (2) chairs, two (2) wall desks, full size shower, water closet with maserator, PA systems, dual zone HVAC, normal and emergency lighting, privacy curtains, etc.	1	EA	$110,528.44	90 days ARO
BCI-28-11		Multi-Track Loader and Attachment Container - Consists of an ISO 20 foot container which is modified and outfitted to store a Multi-Track Loader along with five (5) attachments complete with lighting and electrical system. Rail impact and road testing for truck, rail, air and ship transport. Furnished without MTL equipment. Complete cabability lists and design available upon request.	1	SET	$39,925.26	90 days ARO

Earl Industries, LLC
2 Harper Avenue
Portsmouth, VA 23707
Phone: 757-393-0034
Fax: 757-393-7672

FOB Portsmouth, VA
Terms 1% 20 days, Net 30
Contract Manager:
Michael Barkan
email: sales@earlmfg.com

Contract Number:
GS-07F-0419U

Period 7/1/08 - 6/30/13

BCI-28-12		Construction Tools Container - Consists of an ISO 20 foot container which is modified and outfitted to store numerous hand and power tools, lubricants, maintenance items, concrete mixers, etc. complete with lighting and electrical system. Rail impact and road testing for truck, rail, air and ship transport. Furnished without equipment. Complete cabability lists and design available upon request.	1	SET	$49,769.84	90 days ARO
BCI-28-13		Construction Consumables Container - Consists of a Full Access ISO 20 foot container which is modified and outfitted to store road repair consumbles, sheet goods, concrete saw, etc. complete with lighting and electrical system. Rail impact and road testing for truck, rail, air and ship transport. Furnished without equipment. Complete cabability lists and design available upon request.	1	SET	$52,723.22	90 days ARO
BCI-28-50		Force Protection Vehicle Blast Repair - Consists of one (1) side access 20' container with internal outrigging for vehicle axle, palletized stowage of spare tires and wheels, misc. repair parts and tools. Does not include the vehicle parts or tools. Complete specification is available upon request.	1	EA	$213,299.33	90 days ARO
BCI-28-51		Rib Boat Container - One (1) 20' side access container with a Rib Boat storage craddle designed for forklift removal and a palletized system for storage spare engine, repair parts and tools. Does not include boat, spares or tools. Complete specification available upon request.	1	EA	$71,099.77	90 days ARO

Earl Industries, LLC
2 Harper Avenue
Portsmouth, VA 23707
Phone: 757-393-0034
Fax: 757-393-7672

FOB Portsmouth, VA
Terms 1% 20 days, Net 30
Contract Manager:
Michael Barkan
email: sales@earlmfg.com